


Hi-end hi-fi that
won't burn a hole
in your pocket.

www.exposurehifi.com

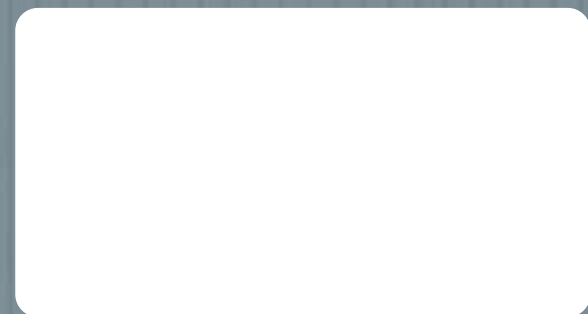

In line with Exposure's policy of continuous improvement, we reserve the right to change technical specifications without prior notice.

Exposure Electronics Ltd: **The Works** 59 North Street, Portslade, East Sussex BN41 1DH, England. Tel: +44 1273 423877 Fax : +44 1273 430619
Exposure Asia Pacific: **The Works Two** 117A, Jalan SS2/24, 47300 Petaling Jaya, Selangor, Malaysia. Tel: +603 7875 8181 Fax: +603 7875 2833



EXPOSURE 3010 SERIES

exposure
high fidelity engineering

Competition just got tougher

The benchmark for high fidelity equipment has just been raised. Never before have there been such distinctive quality and sound delivered at such sheer value for money. Until now.

Introducing the new 3010 series from Exposure. Engineered with all the attention to detail and value that one would expect in high-end hi-fi. Without burning a hole in your pocket.

Simply because, as engineers of award-winning hi-fi equipment for over 30 years, Exposure believes that it's high time great-sounding music was made available to everyone.



Exposure 3010 series

3010 Compact Disc Player

Value beyond compare

- Twin Burr-Brown PCM 1704 mono 24 true multi-bit DACs fitted to provide very high resolution.
- CD display can be turned off for improved sound quality.
- Highly optimised audio output circuitry with multiple stages of supply regulation.
- Large toroidal power transformer with separate windings for CD transport mechanism and audio stages. High capacity supply for audio stages.
- Employment of a high-stability crystal clock reference and dedicated power supply regulator for the transport and audio stages to ensure low jitter.
- High quality double-sided PCBs for optimum layout and screening.
- All-aluminium casework and extruded front panel control resonance and stray electro-magnetic fields.
- Full-function remote control.
- Three-year guarantee.



Specifications :

Output Level : 2V RMS ref 1KHz 0dB
 Frequency Response : +/- 0.25dB (20Hz - 20 KHz)
 Total Harmonic Distortion : <0.003% ref 1kHz 0dB
 Signal to Noise Ratio : >108dB, A weighted
 Dynamic range : >104dB
 Digital Outputs : SP/DIF Coaxial and Optical
 Mains Supply : 110/120V or 220/240V, 50/60Hz (factory set)
 Power Consumption : <25VA
 Remote batteries : Type AAA 1.5V
 Dimensions (H x W x D) : 90mm x 440mm x 300mm
 Nett Weight (Unpacked) : 5Kg
 Gross Weight (Packed) : 7Kg

3010 Compact Disc Player

Hi-Fi Choice, UK

“ The bass is almost juicy with the right disc - quite an accolade for a CD player ”



3010 Integrated Amplifier

Specifications :

Power Output : 100 Watts per channel at 1KHz into 8 Ohms
 Input Impedance : 17K ohms minimum (line inputs)
 Input Sensitivity : 250mV
 Pre-amplifier output : 1V, with rated input (gain +18dB full volume)
 Frequency Response : 20Hz - 20 KHz ±0.5dB
 Total Harmonic Distortion : <0.03% at rated output, ref 1 KHz
 Signal to noise : >100 dB A weighted, ref rated output
 Channel Separation : >60dB, 20Hz - 20KHz
 Mains Supply : 110/120V or 220/240V, 50/60Hz (factory set)
 Power Consumption : <350VA, 8 ohm load both channels driven
 Dimensions (H x W x D) : 115 mm x 440 mm x 300 mm
 Nett Weight (unpacked) : 11 Kg
 Gross Weight (Packed) : 13 Kg

Hi-Fi Choice, UK

3010 Integrated Amplifier

All you need in one stunning all-rounder

- High capacity, custom-made toroidal power transformer and power supply capacitors.
- All-aluminium casework and extruded front panel control resonance and stray electro-magnetic fields.
- High quality capacitors used in the signal path.
- Uniquely tuned short signal and power supply path PCB.
- Cascode circuitry utilised for improved power supply immunity.
- Fast bipolar transistor output stage for dynamic and vivid performance.
- Separate pre-amp output with class A buffer stage.
- Bi-wiring compatible.
- 100 watts per channel into 8 ohms.
- Remote control.
- Three-year guarantee.

“ In every important respect, the 3010 delivers all you could ask from an amplifier at this price and, most probably, well beyond. ”

3010 Power Amplifier

Power within reach

- High capacity, custom-made toroidal power transformer and power supply capacitors.
- All-aluminium casework and extruded front panel controls resonance and stray electro-magnetic fields.
- High quality capacitors used in the signal path.
- Very clean and extended low frequency performance.
- Bi-wiring compatible and switchable to mono block mode thereby doubling output current for low impedance loads.
- 100 watts per channel into 8 ohms.
- Three-year guarantee.

Specifications :

Power Output, Stereo Mode : 100 Watts per channel at 1KHz into 8 Ohms
Power Output, Mono Mode : 110 Watts at 1KHz into 8 ohms
Input Impedance : 18Kohm
Input Sensitivity : 1.75V, gain +24dB.
Frequency Response : 20Hz - 20 KHz \pm 0.5dB
Total Harmonic Distortion : <0.015% at rated output, ref 1 KHz
Signal to noise : >110 dB A weighted, ref rated output
Channel Separation : >70dB, 20Hz - 20KHz
Mains Supply : 110/120V or 220/240V, 50/60Hz (factory set)
Power Consumption : <350VA, 8 ohm load both channels driven
Dimensions (H x W x D) : 115 mm x 440 mm x 300 mm
Nett Weight (unpacked) : 11 Kg
Gross Weight (Packed) : 13 Kg



3010 Power Amplifier

www.exposurehifi.com